

TYPE C



Medium Deep Pattern

Diseño medio profundo

Pressed Seamless Steel

Acero estampado

- For free flowing materials
- For other materials at slower speeds


- Para materiales de caída libre
- Para otros materiales a velocidades más lentas

FREE Engineering Design Service - See page 28

Pressed Seamless Steel

Chapa de acero estampada, sin soldaduras

AGRICULTURAL & INDUSTRIAL

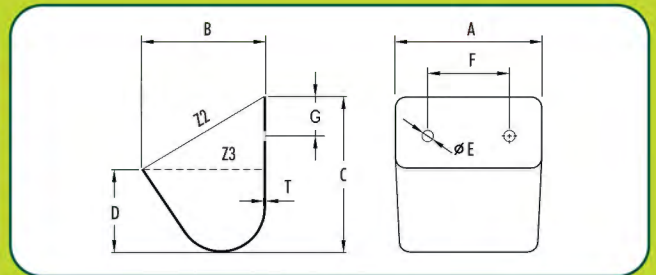

No.	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	Capacity / Capacidad (Litros)			Bolt Holes / Agujeros				
						kg	Z2 (total)	Z3 (water)	No.	E (Ø mm)	F (mm)	G (mm)	
C8	76	79	92	51	1.2	0.16	0.30	0.18	To customer specification Según especificaciones del cliente	2	7.0	54	38
C240	89	79	92	51	1.2	0.18	0.35	0.21					
C12	102	79	92	51	1.2	0.20	0.40	0.24					
C14	102	79	92	51	2.0	0.36	0.40	0.24					
C16	127	79	92	51	1.2	0.25	0.49	0.30					
C19	127	79	92	51	3.0	0.50	0.49	0.30					
C22	152	79	92	51	1.5	0.36	0.59	0.36					
C22P	152	79	92	51	1.5	0.36	0.59	0.36	To customer specification Según especificaciones del cliente				
C27	102	89	108	57	2.0	0.39	0.52	0.32					
C30	127	89	108	57	1.2	0.29	0.66	0.40					
C33	127	89	108	57	3.0	0.68	0.66	0.40					
C37	152	89	108	57	2.0	0.53	0.78	0.50					
C38	152	89	108	57	3.0	0.79	0.78	0.50					
C42	178	89	108	57	2.0	0.68	0.96	0.60					
C47	203	89	108	57	2.0	0.70	1.10	0.68					
C193	140	95	111	57	1.2	0.32	0.79	0.46					
C98	127	102	127	67	1.2	0.34	0.89	0.55					
C106	152	102	127	67	3.0	1.02	1.10	0.66					
C108	178	102	127	67	1.2	0.45	1.25	0.75					
C111	178	102	127	67	3.0	1.13	1.25	0.75					
C116	203	102	127	67	3.0	1.25	1.50	0.92					
C119	229	102	127	67	1.5	0.79	1.80	1.10					

TYPE C



No.	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	Capacity / Capacidad (Litros)			Bolt Holes / Agujeros			
						kg	Z2 (total)	Z3 (water)	No.	E (Ø mm)	F (mm)	G (mm)
CI23	127	114	143	76	1.2	0.43	1.15	0.70				
CI29	152	114	143	76	1.5	0.61	1.35	0.85				
CI31	152	114	143	76	3.0	1.16	1.35	0.85				
CI35	178	114	143	76	1.5	0.68	1.60	1.00				
CI38	178	114	143	76	3.0	1.34	1.60	1.00				
CI41	203	114	143	76	1.5	0.73	1.81	1.06				
CI44	203	114	143	76	3.0	1.45	1.81	1.06				
CI47	229	114	143	76	1.5	0.84	2.10	1.30				
CI50	229	114	143	76	3.0	1.63	2.10	1.30				
CI54	254	114	143	76	1.5	0.93	2.30	1.40				
CI56	254	114	143	76	3.0	1.81	2.30	1.40				
CI59	152	140	159	95	2.0	1.07	1.80	1.20				
CI62	178	140	159	95	1.5	0.84	2.15	1.40				
CI66	203	140	159	95	1.5	0.95	2.45	1.65				
CI68	203	140	159	95	3.0	1.72	2.45	1.65				
CI70	229	140	159	95	1.5	1.07	2.85	1.85				
CI71	229	140	159	95	2.0	1.36	2.85	1.85				
CI72	229	140	159	95	3.0	1.97	2.85	1.85				
CI75	254	140	159	95	2.0	1.43	3.10	2.00				
CI76	254	140	159	95	3.0	2.04	3.10	2.00				
CI79	279	140	159	95	1.5	1.20	3.55	2.35				
CI81	279	140	159	95	3.0	1.86	3.55	2.35				
CI84	305	140	159	95	2.0	1.77	4.05	2.70				
CI85	305	140	159	95	3.0	2.54	4.05	2.70				
C213	305	165	206	156	3.0	3.63	6.45	5.25				
C231	356	181	181	117	3.0	3.61	6.55	4.70				

To customer
specification
Según especificaciones
del cliente