



ANACONDA BELTING COMPANY

(A Division of Wildex Limited)

Unit 29 Church Road, Sittingbourne, Kent ME10 3RS


Tel: 01474 709784 Fax: 01474 709896

website: www.anacondabelting.co.uk

e-mail: sales@anacondabelting.co.uk

# P3PU

## POLYURETHANE DUCTING HEAVY WEIGHT

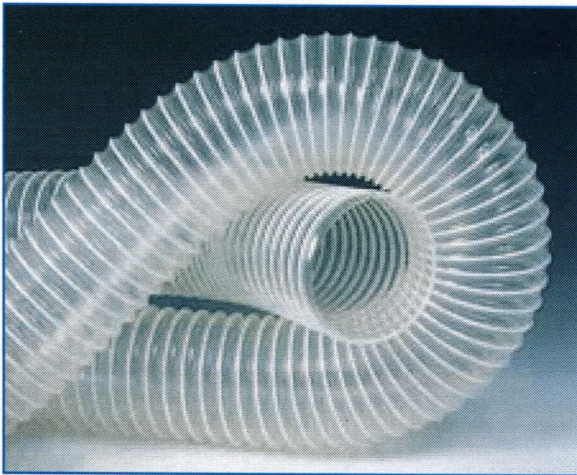

### CONSTRUCTION:

Polyester-Polyurethane wall with an embedded PVC coated spring steel wire helix. *1mm Thick.*

### COLOUR:

Clear.

### STANDARD LENGTH:

10 Metres up to 160mm diameter.

5 Metres from 178mm Diameter

### TEMPERATURE RANGE:

-40°C to +100°C in a 20°C ambient.

### APPLICATIONS:

Suction and discharge of abrasive materials, in a wide range of industries.

### PROPERTIES:

Non toxic, abrasion resistant, relatively smooth bore, robust and durable.

### OPTIONS:

P3PU AE - Resistant to hydrolysis

P3PU AS - Anti-static (R<10<sup>8</sup> ohms)

### Technical Data

Diameter mm	Weight Kg/m	Bend Radius mm	Max. Work. Press. Bar	Max. Vacuum Bar
19	0.17	30	2.30	0.70
25	0.20	35	2.20	0.60
32	0.25	45	2.10	0.50
38	0.35	60	2.00	0.45
51	0.44	75	1.80	0.40
65	0.53	90	1.60	0.35
76	0.61	105	1.50	0.35
80	0.67	120	1.20	0.30
89	0.75	135	1.10	0.30
102	1.02	150	1.00	0.30
115	1.20	165	0.75	0.25
127	1.28	185	0.75	0.25
140	1.40	205	0.60	0.20
152	1.46	225	0.50	0.20
160	1.60	240	0.45	0.20
178	1.70	260	0.45	0.15
203	1.94	300	0.35	0.12
228	3.00	335	0.30	0.11
254	3.15	375	0.25	0.10
305	3.78	450	0.20	0.09
357	4.41	525	0.15	0.09
408	5.05	600	0.10	0.08

Technical data at + 20°C.

Other diameters/lengths available upon request.