



TYPE CC-S® AMERICAN GRAIN

A big volume, heavy duty bucket offering greater capacities.
Moulded from premium virgin white polymer for ultimate strength and durability.

- > **Stackable design** saves freight and storage costs
- > **Maximum impact resistance**
- > **Thickest front lip in the grain industry** for no bowing and backlegging
- > **"Iceberg edge"™** ensures clean and consistent discharge
- > **"Engineered" for longer life and better performance**

STACKABLE CC-S STYLE HDP / NYLON / POLYURETHANE

Agricultural

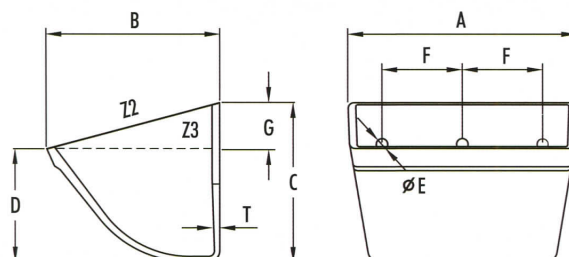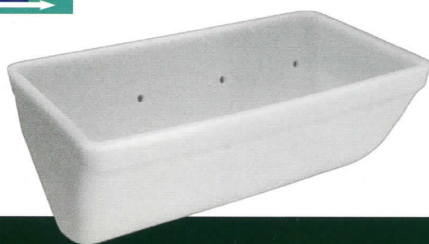


							Capacity (Litres)			Holes				
No.	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	(kg)	Z2 (total)	Z3+10%	Z3 (water)	No.	E (Ø mm)	F (mm)	G (mm)	Max. Pcs/Mtr
CC-S 3x2	85	64	53	35	4.5	0.05	0.13	0.14	0.10	To customer specification				15.75
CC-S 4x3	112	89	78	54	5.0	0.11	0.37	0.32	0.29					11.25
CC-S 5x4	135	115	103	72	5.0	0.20	0.80	0.66	0.60					8.75
CC-S 6x4	161	115	103	72	5.0	0.23	0.96	0.81	0.74					8.75
CC-S 7x4	186	115	103	72	5.0	0.26	1.13	0.96	0.87					8.75
CC-S 6x5	163	141	131	93	6.0	0.37	1.48	1.27	1.15					7.15
CC-S 7x5	189	141	131	93	6.0	0.41	1.74	1.49	1.35					7.15
CC-S 8x5	214	141	131	93	6.0	0.45	2.00	1.72	1.56					7.15
CC-S 9x5	240	141	131	93	6.0	0.50	2.22	1.88	1.71					7.15
CC-S 10x5	265	141	131	93	6.0	0.54	2.53	2.17	1.97					7.15
CC-S 11x5	290	141	131	93	6.0	0.59	2.78	2.39	2.17					7.15
CC-S 12x5	316	141	131	93	6.0	0.62	3.05	2.62	2.38					7.15
CC-S 8x6	213	171	154	105	6.0	0.56	2.76	2.31	2.10					6.00
CC-S 9x6	239	171	154	105	6.0	0.64	2.95	2.59	2.35					6.00
CC-S 10x6	264	171	154	105	6.0	0.68	3.38	3.03	2.75					6.00
CC-S 11x6	289	171	154	105	6.0	0.72	3.85	3.41	3.10					6.00
CC-S 12x6	315	171	154	105	6.0	0.78	4.30	3.63	3.30					6.00
CC-S 13x6	340	171	154	105	6.0	0.84	4.60	3.96	3.60					6.00
CC-S 14x6	358	171	154	105	6.0	0.90	5.05	4.35	3.95					6.00

TYPE CC-S® AMERICAN GRAIN

PRODUCT TESTING - Rigorous product testing on all of our material handling components is conducted at 4B's own in-house testing facilities. This ensures that we provide our customers with the best products in quality, durability and performance.

Free Engineering Design Service - contact Anaconda Belting Company

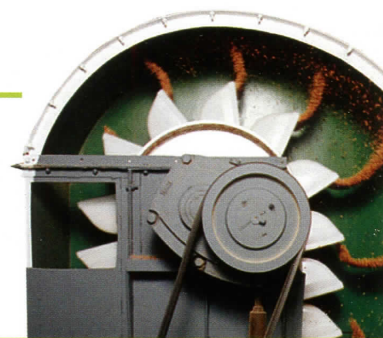

UNIQUE ICEBERG® EDGE HEAVY DUTY FRONT

Lip with maximum material thickness and a tapered leading edge for a longer wear life. The triangular rigid design prevents bowing for a consistent discharge over the life of the bucket.

No.	A (mm)	B (mm)	C (mm)	D (mm)	T (mm)	(kg)	Capacity (Litres)			No.	Holes			Max. Pcs/Mtr
							Z2 (total)	Z3+10%	Z3 (water)		E (Ø mm)	F (mm)	G (mm)	
CC-S 10x7	273	200	180	127	8.0	1.05	5.12	4.36	3.96	To customer specification				5.25
CC-S 11x7	299	200	180	127	8.0	1.10	5.60	4.80	4.40					5.25
CC-S 12x7	324	200	180	127	8.0	1.20	6.18	5.27	4.79					5.25
CC-S 13x7	350	200	180	127	8.0	1.28	6.71	5.72	5.20					5.25
CC-S 14x7	375	200	180	127	8.0	1.37	7.25	6.18	5.62					5.25
CC-S 15x7	400	200	180	127	8.0	1.45	7.76	6.63	6.03					5.25
CC-S 16x7	426	200	180	127	8.0	1.53	8.30	7.08	6.44					5.25
CC-S 10x8	275	228	210	149	10.0	1.44	6.66	5.71	5.19					4.60
CC-S 11x8	300	228	210	149	10.0	1.55	7.35	6.30	5.73					4.60
CC-S 12x8	326	228	210	149	10.0	1.66	8.07	6.92	6.29					4.60
CC-S 13x8	351	228	210	149	10.0	1.76	8.75	7.51	6.83					4.60
CC-S 14x8	377	228	210	149	10.0	1.88	9.47	8.14	7.40					4.60
CC-S 15x8	402	228	210	149	10.0	1.97	10.16	8.73	7.94					4.60
CC-S 16x8	427	228	210	149	10.0	2.05	10.85	9.33	8.48					4.60
CC-S 18x8	479	228	210	149	10.0	2.30	12.28	10.57	9.61					4.60
CC-S 20x8	529	228	210	149	10.0	2.50	13.65	11.77	10.70					4.60

STACKABLE DESIGN
FOR REDUCED SHIPPING & STORAGE COSTS

