

4B EURO BOLT



AVAILABLE IN STEEL/STAINLESS STEEL

- > Manufactured to approx. DIN15237
- > ISO grade 5.8 (exceeds DIN15237)
- > Large bolt head diameter
- > Fully threaded
- > Available as zinc plated, self-colour or stainless
- > Alternative choice of packings:
 - Bolt, hex nut & domed washer boxed/100
 - Bolt only, bulk packed in bags
- > Bolt torque rating dependent on bucket & belt size




For steel buckets with recessed holes use:
Bolt, hexagon nut and large domed washer.



For steel buckets with flat holes use:
Bolt, hexagon nut and small flat washer.



For plastic buckets use:
Bolt, hexagon nut and large flat washer.

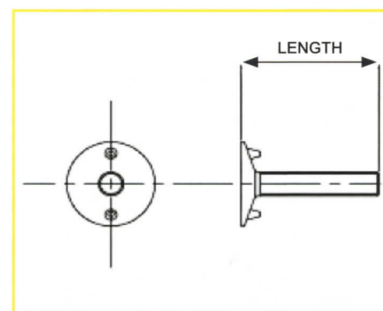

Bolt, hex nut, small washer (boxed/100) - weight Kg/100

REF.	HEAD Ø (mm)	MAX. BOLT TORQUE (Nm)	BOLT LENGTH (measured overall)									
			20 (mm)	22 (mm)	25 (mm)	30 (mm)	35 (mm)	40 (mm)	45 (mm)	50 (mm)	60 (mm)	70 (mm)
M6	21	8	1.28	-	1.38	1.50	-	-	-	-	-	-
M7	23	13	1.82	1.94	2.10	2.16	2.22	-	-	-	-	-
M8	28	20	2.98	2.00	3.00	3.02	3.37	3.72	3.88	3.94	-	-
M10	35	36	-	-	5.42	5.43	5.44	5.84	6.02	6.18	-	-
M12 ¹⁾	42	65	-	-	-	-	-	9.24	-	4.96*	5.36*	5.60*

1) Not available in stainless steel / * Weight Kg/50

Bolts Only (bulk packet) - weight Kg/packet

REF.	BOLT LENGTH (measured overall)										Qty
	20 (mm)	22 (mm)	25 (mm)	30 (mm)	35 (mm)	40 (mm)	45 (mm)	50 (mm)	60 (mm)	70 (mm)	
M6	19.4	-	20.8	21.4	-	-	-	-	-	-	2000
M7	20.1	21.3	22	24.2	17.5*	-	-	-	-	-	1500
M8	10.1	11.1	11.3	12.3	13	13.7	14.3	14.9	-	-	500
M10	-	-	18.8	20	21	22.3	23.7	12.6**	-	-	500
M12 ¹⁾	-	-	-	-	15.9	16.7	17.7	18.7	20.8	23.2	250

1) Not available in stainless steel / * Packed in 1000's / ** Packed in 250's