


4B REF 70™ BOLT



AVAILABLE IN STEEL / STAINLESS STEEL

- Steel – ISO grade 5.8 (exceeds DIN 15237)
- Concave head with 4 lugs on the underside to prevent rotation when tightening
- Hexagon nut and small flat washer included
- Available in Whitworth thread or metric thread
- Zinc plated (self colour on special request)
- Bolt torque rating dependent on bucket & belt size

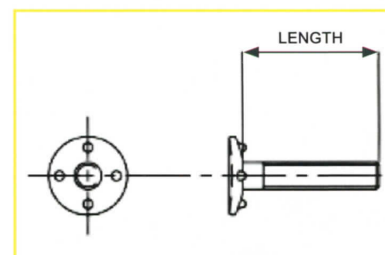

REF.	HEAD Ø (mm)	MAX. BOLT TORQUE (Nm)	BOLT LENGTH (measured from under the bolt head) Kg/100								
			1/2" 12 (mm)	3/4" 20 (mm)	1" 25 (mm)	1 1/4" 30 (mm)	1 1/2" 40 (mm)	1 3/4" 45 (mm)	2" 50 (mm)	2 1/4" 55 (mm)	2 1/2" 65 (mm)
1/4" BSW M6	17	5	1.04	1.18	1.24	1.48	1.56	-	-	-	-
5/16" BSW M8	23	10	-	2.08	2.38*	2.54*	2.90*	-	3.24	-	-
3/8" BSW M10	27	18	-	-	3.94	4.44*	4.80*	5.08*	5.36*	5.50	5.72
1/2" BSW M12	35	42	-	-	-	7.44	7.78	8.12	8.44	9.08	-

* Available in stainless steel

4B LARGE OVAL WASHER



AVAILABLE IN ZINC-PLATED STEEL/STAINLESS STEEL

- Use with Ref 70TM bolts in heavy duty applications
- Locates over 4 lugs on bolt head, increasing effective bolt head size and bolt holding
- Belt must be thick enough to absorb the washer and / or the bucket belt holes should be recessed
- Not recommended on pulley diameters of less than 20" (500mm)
- Fit the longest part of the oval across the belt width

REF.	Ø	(mm)	Kg/100
LOW1	1/4" M6	33/45	1.44
LOW2	5/16" M8*	37/50	2.22
LOW3	3/8" M10*	45/57	2.90
LOW4	1/2" M12*	53/63	3.94

* Available in stainless steel