



B400 ELITE

TECHNOLOGY • INNOVATION • QUALITY • VALUE

B400 ELITE Elevator & Conveyor Belt Alignment Monitoring System

B4004V4CAI - B400 Elite control unit
Supply: 12 to 24 DC
Ex II 2D T125°C zone 21 & 22

B4004V46CAI - B400 Elite control unit
Supply: 95 to 250VAC /12 to 24 DC
Ex II 3D T125°C zone 22



APPLICATION

The B400 Elite control unit detects the dangerous misalignment of belts, preventing costly downtime and helping to eliminate the risk of explosion.

The B400 Elite works with up to four sensors (TS1V4A, BS15V10AI OR BS25V10AI) situated along the side of the belt to monitor belt tracking.

KEY FEATURES

- ▶ The B400 elite can monitor the alignment of a belt in one elevator, both at the top and the bottom, or in two separate bucket elevators
- ▶ Alarm and Shut down Relays with time delay options
- ▶ Control unit LEDs indicate the running, alarm and shutdown status of each elevator
- ▶ Easy on-site Installation
- ▶ Full system test feature
- ▶ Voltage free relay contacts
- ▶ IP 66, Nema 12
- ▶ ATEX, IECEx & CSA Approved

OPTIONS

- ▶ RS485 serial communication

Detailed specification, wiring diagrams and installation/operating instructions available immediately upon request.



ATEX zone 21 & 22




CLASS 2 Div. 1
Groups E, F & G



B400 ELITE

TECHNOLOGY · INNOVATION · QUALITY · VALUE

TECHNICAL SPECIFICATIONS		
Model	B4004V46CAI	B4004V4CAI
Approval	ATEX & IECEx Zone 22 Ex II 3D T125°C T amb -15 to +50°C BAS03ATEX0674X & CSA	ATEX & IECEx Zone 21 Ex II 2D T125°C T amb -15 to +50°C BAS03ATEX0674X & CSA
Enclosure	Polycarbonate	
Supply	95 to 250 VAC 12 to 24 VDC	12 to 24 VDC
Rating	10 VA	
Protection	IP 66	
Contact relay ALARM	ALARM A: 1 contact NO 8 A 250 Vac ALARM B: 1 contact NO 8 A 250 Vac	
Contact relay STOP	STOP A: 1 contact NO 8 A 250 Vac STOP B: 1 contact NO 8 A 250 Vac	
Dimension	HxLxD: 246 x 188 x 102 mm	
Entry	2 holes drilled to dia. 28 mm	
Fixt point	222 x 102 mm	
Weight	1,3 Kg	

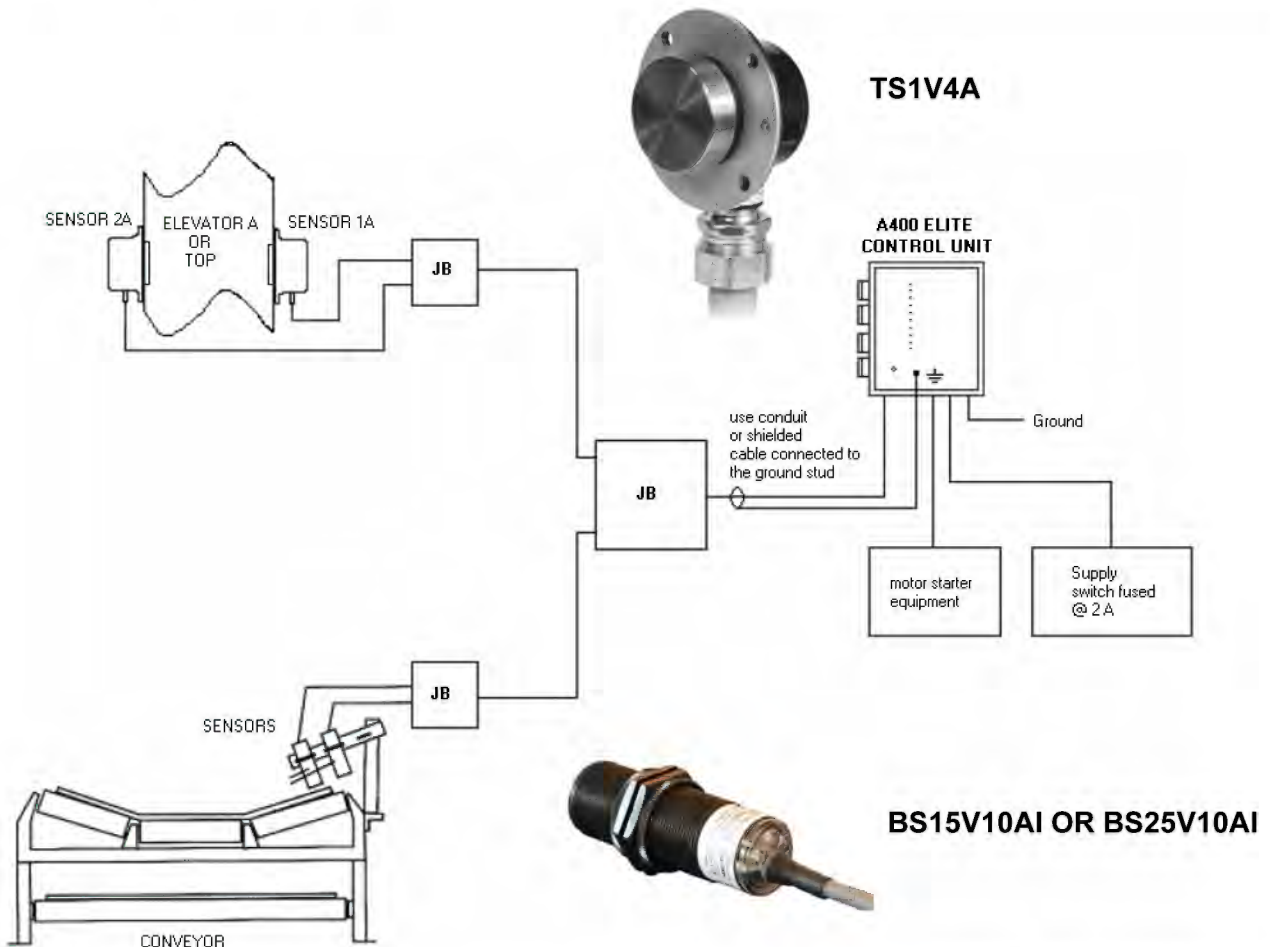

Please refer to instruction manual for correct installation.
Information subject to change or correction. February 2006.